




845GL-MUT Mainboard Overview

Supports Socket 478 Intel® Pentium™4 and Celeron™ CPUs
FSB Clock : 400 MHz PSB (Processor System Bus) (100 MHz QDR)
184-pin DDR-DIMM x2, maximum 2GB
PCI x3
6 USB Ports (Version 2.0) supported
2 Channel AC97 Audio.
Micro ATX Form Factor : 24.4 cm x 23.0 cm

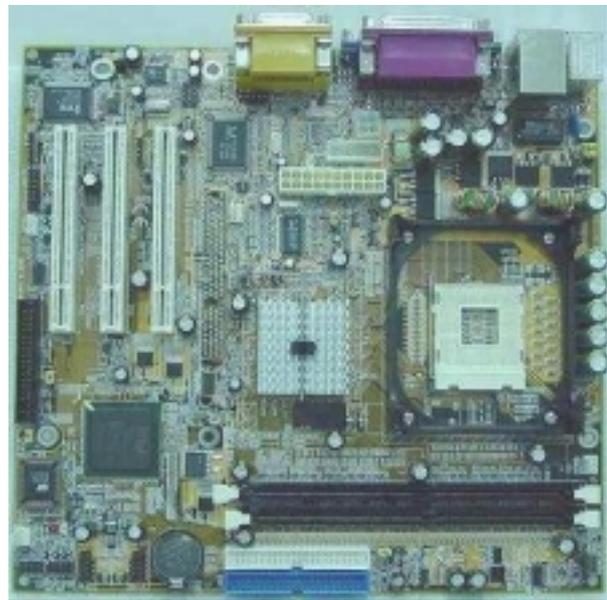

Detailed Specifications

Chipset

- Northbridge Core Chipset : Intel® RG845GL (GMCH)
Southbridge Core Chipset : Intel® FW82801DB (ICH4)
- Supports DDR DIMM up to 2GB maximum memory
 - Supports 400 MHz system bus
 - 2 Channel Ultra ATA33/66/100 Bus Master IDE controller
 - 6 USB controller 2.0
 - 3 PCI 2.2 interface
 - AC'97 interface
 - 1 On-Chip VGA

On-Board Peripherals

- 1 PS/2 Keyboard connector
- 1 PS/2 Mouse connector
- 1 Floppy Disk Controller supports 2 FDDs from 360K to 2.88Mbytes
- 2 Channel Bus Master IDE controller connect up to four units of IDE devices
- 2 Serial Ports (COM 1 + COM 2)
- 1 Parallel Port supports SPP/EPP/ECP mode
- 1 Integrated AC'97 2-channel sound interface
- 6 USB (2.0) Ports
- 1 Game/Midi Port
- On-board VGA

BIOS

- 2Mb Flash ROM, Phoenix-Award BIOS support ACPI, PnP and DMI

System Memory

- DDR DIMM x 2, support DDR200/DDR266 up to 2GB

Useful Connectors

- 1 CD-IN connector
- 1 Aux-In connector
- 3 FAN connectors for CPU & Chassis
- 1 WOL connector for Wake on Lan function

Special Features

- Front USB (Type : Intel)
- Front AUDIO (Type : Intel)
- Hardware Monitoring (ITE IT8712F)

Optional Items

- 1 IrDA connector for SIR
- 1 SCR connector
- S/PDIF connector

Azza Value Bundle



More than just a Mainboard