



KM266-MNB Mainboard Overview

Support Socket A for AMD Athlon XP, Athlon and Duron processors

FSB Clock : 200 / 266MHz

184-pin DDR-DIMM x2, maximum 1GB


4X AGP x1, PCI x3

6 USB Ports (Version 2.0) supported

Onboard VGA

Onboard AC97 Audio

Micro-ATX Form Factor : 24.4 cm x 20.0 cm

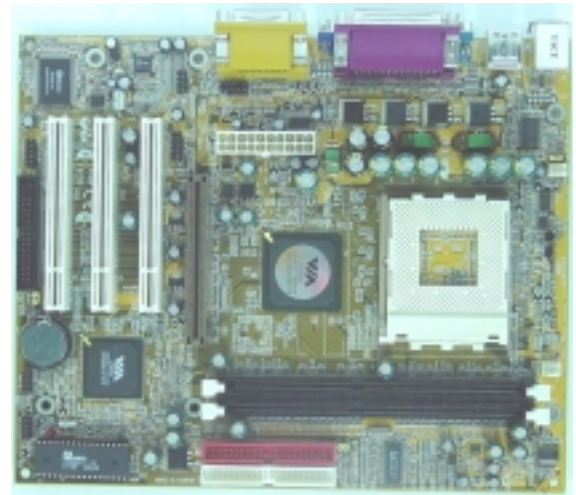

Detailed Specifications

Chipset

Northbridge Core Chipset : VIA KM266

Southbridge Core Chipset : VIA VT8235 (CD)

- Supports DDR DIMM up to 1GB maximum memory
- Supports 266 MHz system bus
- AGP interface with 2X/4X data transfer rate and fast write capability
- 2 Channel Ultra ATA33/66/100/133 Bus Master IDE controller
- 4 USB controller 2.0
- 3 PCI 2.2 interface
- AC'97 interface (ALC202A)

On-Board Peripherals

- 1 PS/2 Keyboard connector
- 1 PS/2 Mouse connector
- 1 VGA connector
- 1 Serial Ports (COM 1)
- 1 Parallel Port supports SPP/EPP/ECP mode
- 1 Floppy Disk Controller supports 2 FDDs from 360K to 2.88Mbytes
- 2 Channel Bus Master IDE controller connect up to four units of IDE devices
- 1 Integrated onboard VGA (Onchip Savage 4)
- 1 Integrated AC'97 2-channel sound interface (ALC202A)
- 6 USB (2.0) Ports
- 1 Game/Midi Port

BIOS

- 2Mb Flash ROM, Phoenix-Award BIOS support ACPI, PnP and DMI

System Memory

- DDR DIMM x 2, support DDR200/DDR266 up to 1GB

Useful Connectors

- 1 CD-IN connector
- 1 Aux-In connector
- 2 FAN connectors for CPU & Chassis
- 1 WOL connector for Wake on Lan function

Special Features

- Front USB (Type : Intel)
- Front AUDIO (Type : Intel)
- Hardware Monitoring (WINDBOND W83697HF)

Optional Items

- 1 IrDA Connector for SIR
- S/PDIF connector

Azza Value Bundle



More than just a Mainboard