

JP7,JP8: On board VGA Enable/Disable jumper

- Open: Disable on board VGA function
- Short: Enable on board VGA function

JP14: System break switch connector

JP17: COMS data clear jumper


- 1-2 short: Normal (Default)
- 2-3 short: COMS data clear

JP20 : SRAM Module Type Setting

- 1-2 short :Async. SRAM
- 2-3 short :Burst/pipeline-Burst SRAM

Don't install DIP type SRAM and Cache Module SRAM at the same time.

J7: IrDA header



J8: Digital volume control connector

J18: Green LED connector

J20: Hard disk LED connector

J21: Keyboard lock connector

J22: Speaker connector



J23: Reset switch connector

J24: Turbo LED connector

J25: Turbo switch connector

JP27: SRAM type Setting


Function	JP27
MIX	
3.3V	

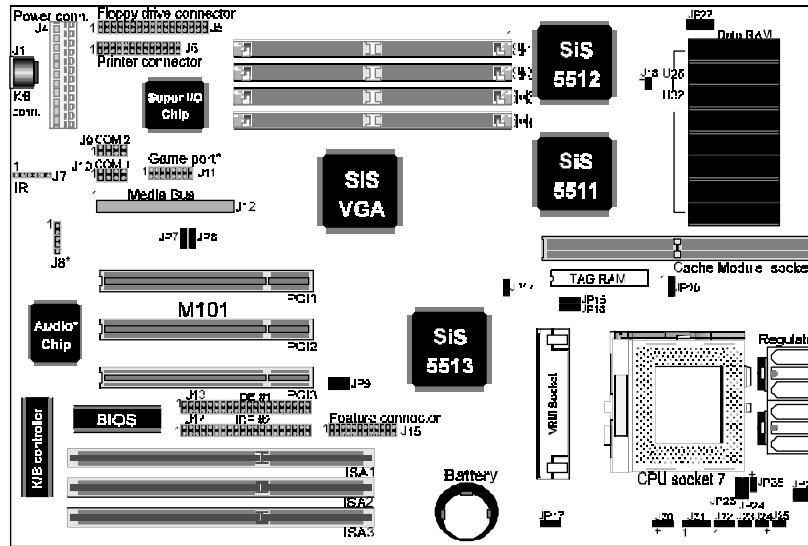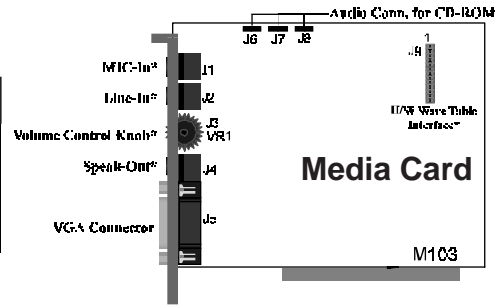

JP15,JP16: External cache size jumper setting

Cache size	Jumper Setting	TAG RAM U 21	Data RAM U25-U32
256K		8K x 8	32K x 8
512KB		32K x 8	64K x 8
1MB		32K x 8	128k x 8

**** VRM (Voltage Regulator Module) Socket**
Using on board regulator set, please set VRM P6 & P7, P21 & P22 short.



CPU-type	S-space	CPU power Voltage		System clock		CPU Speed			
		v	JP26	MHz	JP9	Speed rate	JP24, JP25		
Intel	P54C-75	3.3		50		x1.5			
Intel	P54C-90	QO653 QO655 SZ978 SX957 SX959	3.3		60	x1.5			
		QO654 SX958	3.4						
			3.5						
Intel	P54C-120	QO708	3.3		60	x2			
		P54C-150	3.5					x2.5	
Cyrix	6x86-P150 ⁺ @120MHz	3.3				x2			
Intel	P54C-100	QO656	3.3		66	x1.5			
		QO657	3.4						
	P54C-133	3.5		x2					
									P54C-166
	P54C-200	3.5		x3					
Cyrix	6x86-P120 ⁺ @100MHz	3.3				x1.5			
	6x86-P166 ⁺ @133MHz							x2	

* Support for Audio on board model only.