
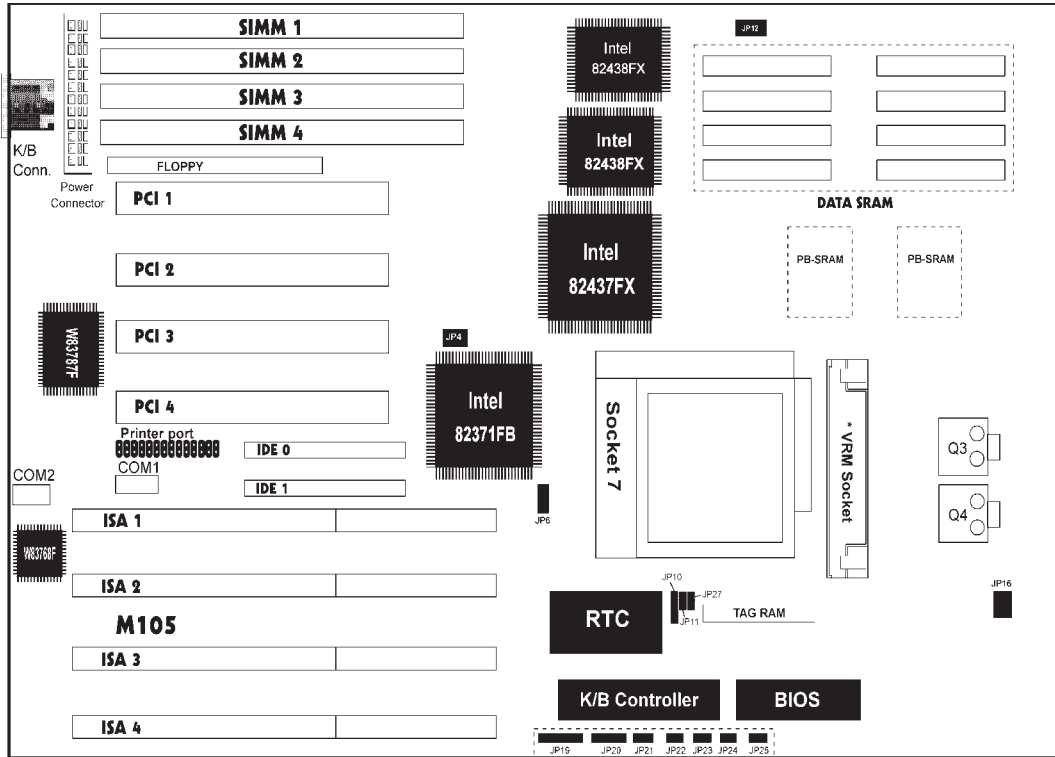


JP12: SRAM type select jumper


5V (Mix mode) SRAM 

3.3V SRAM 

























- JP19: Keyboard lock connector
- JP20: Speaker connector
- JP21: Turbo switch connector
- JP22: Hard disk LED connector
- JP23: Green switch connector
- JP24: Turbo LED connector
- JP25: Reset switch connector
- Q3/Q4: CPU Vcc Regulator

* VRM (Voltage Regulator Module) Socket
Using on board regulator set, please set VRM P6 & P7, P21 & P22 short



Cache	JP10	TAG RAM (U38)	DATA RAM (U26-33)
256K		8K x 8	32K x 8
512K		16K x 8 or 32K x 8	64K x 8

CPU	Power Voltage version No.		Vcc JP16		System clk JP4,JP6	CPU Int. speed JP11,JP27**		
	STD	VR	3.3			50		x1.5
P54C-75	STD	QO-666 SX-961	3.3		50		x1.5	
		QO-700 SX-969						
P54C-90	STD	QO-653 SX-957 QO-699 SX-968	3.3		60		x1.5	
	VR	QO-654 SX-958	3.4					
	VRE	QO-655 SX-959	3.5					
P54C-100	STD	QO-697 SX-963	3.5		66		x1.5	
	VRE	QO-698 SX-970						
P54C-120	STD/ VRE	QO-711 SX-994 QO-732 SK-086	3.5		60		x2	
P54C-133	STD/ VRE	QO-773 SK-103 QO-775 SK-107	3.5		66		x2	
P54C-150	STD/ VRE		3.5		60		x2.5	

** CPU Internal Speed Setup

CPU Internal speed	JP11	JP27
1.5 x system clock	O	O
2 x system clock	S	O
2.5 x system clock	S	S
3 x system clock	O	S

***The power voltage version No. is on the top of CPU.
If you cannot identify CPU type from above table, please contact your dealer.