


SHUTTLE COMPUTER INTERNATIONAL, INC.

HOT-317 (VER.R3.0)

Processor 80386DX
Processor Speed 40 MHZ
Chip Set OPTI
Max. Onboard DRAM 64MB
Cache 128KB
BIOS AMI
Dimensions 220mm x 170mm
I/O Options None
NPU Options 80387DX

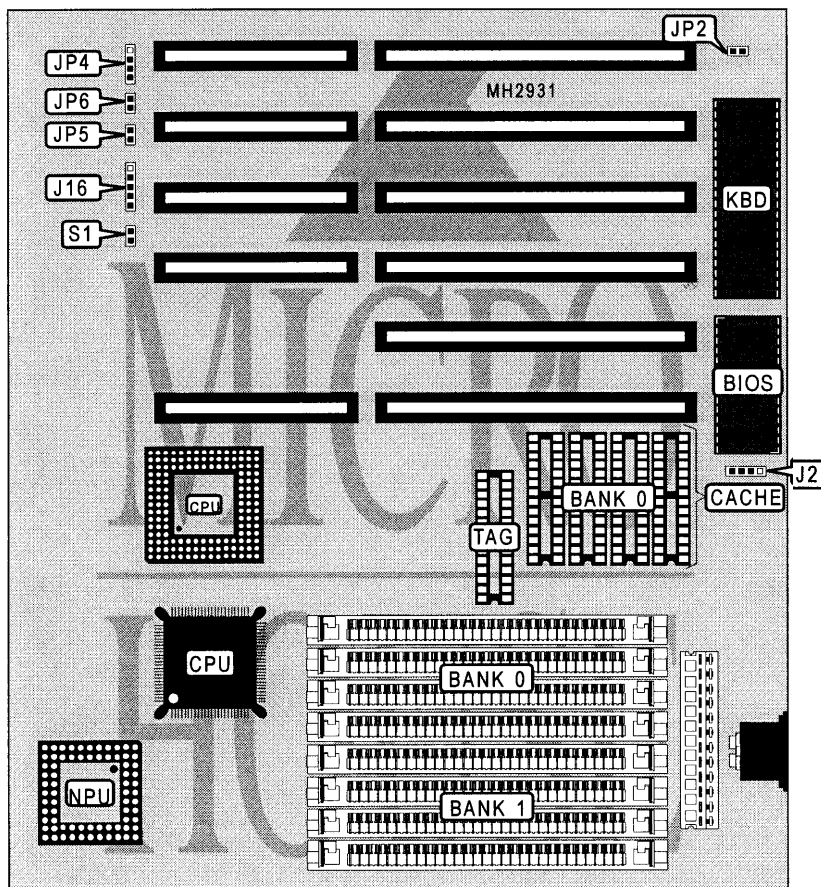

CONNECTIONS

Purpose	Location	Purpose	Location
External battery	J2	Turbo switch	JP5
Power LED & keylock	J16	Turbo LED	JP6
Speaker	JP4	Reset switch	S1

Continued on next page. . .

SHUTTLE COMPUTER INTERNATIONAL, INC.

HOT-317 (VER.R3.0)

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
⇨ Battery type select internal	J2	pins 2 & 3 closed
Battery type select external	J2	Closed
⇨ Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open
⇨ Turbo enabled	JP5	Open
Turbo disabled	JP5	Closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1
1MB	(4) 256K x9	NONE
2MB	(4) 256K x9	(4) 256K x9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9
64MB	(4) 16M x 9	NONE

CACHE CONFIGURATION

Size	Bank 0	TAG
128KB	(4) 32K x8	(1) 32K x 8